

SPECIFICATION

MATERIAL

Insulator: LCP ,Rated UL94V-0

Contacts: Copper Alloy

ELECTRICAL

Current Rating: 1A, 250V AC

Insulation Resistance: 1000M ohm Min

Contact Resistance: 30m ohm Max.

Dielectric Withstanding Voltage: AC 500V FOR 1 Minute

Operating Temperature: -25°C To +105°C

PART NO.

740 A X 168 S A A B Q 3
1 2 3 4 5 6 7 8 9 10

1.SERIES NO.

2.TYPE:

A=Standard

3.ENVIRONMENT PROTECTION

MATERIAL:

--General

E=Rohs

4.CONTACT NUMBER:

168

5.CONTACT PLATING:

S=Gold Flash (Selective)

6.CONTACT AREA

A=180°

7.PROCESS OPTION:

A=Hige Latch





8.PARTS OPTION:

B=Metal Polarizing Peg

9.FILL IT WITH "0"

10.INSULATOR COLOR:

3=Black

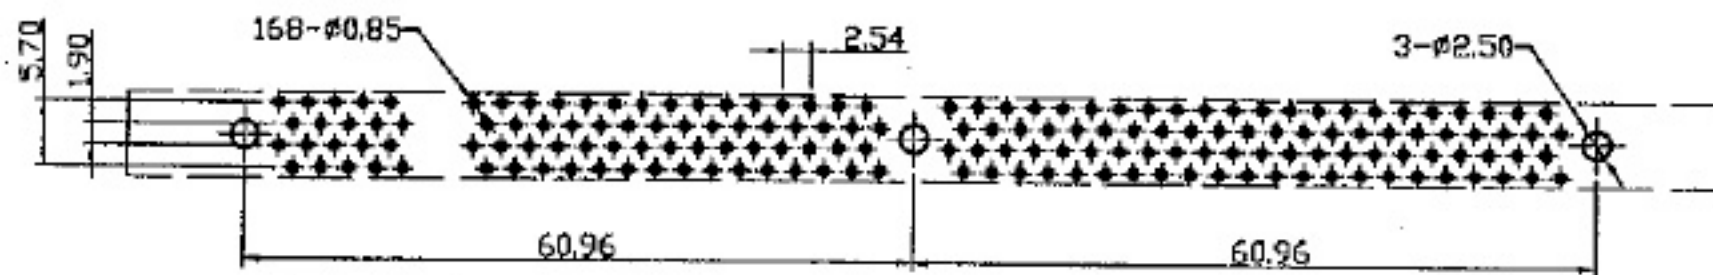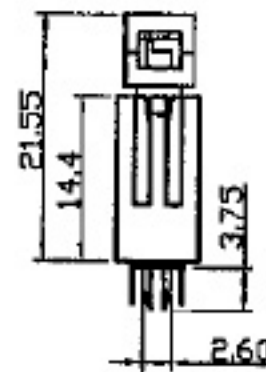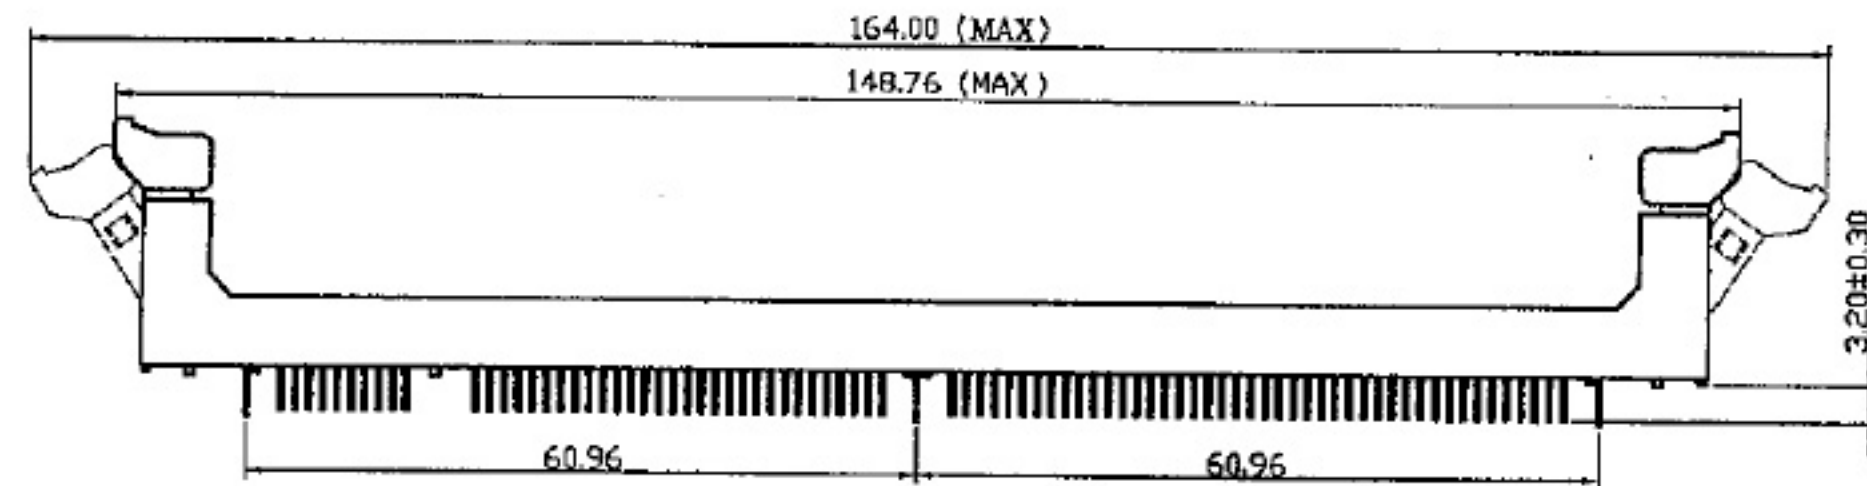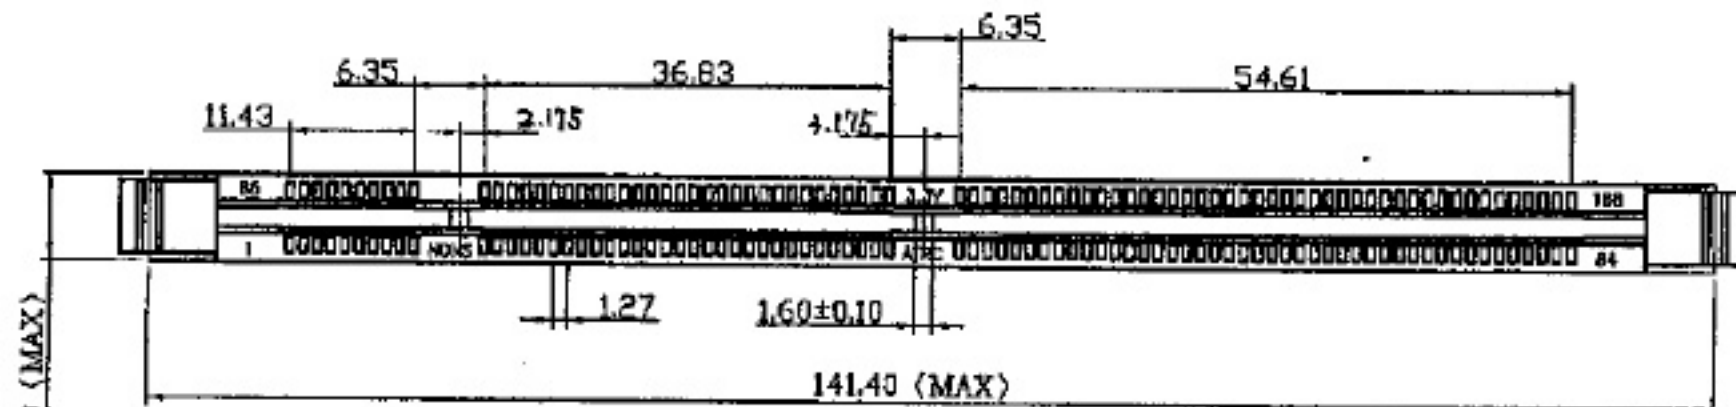

RECOMMENDED P.C.B LAYOUT(TOP VIEW)

TOLERANCES: ±0.05mm