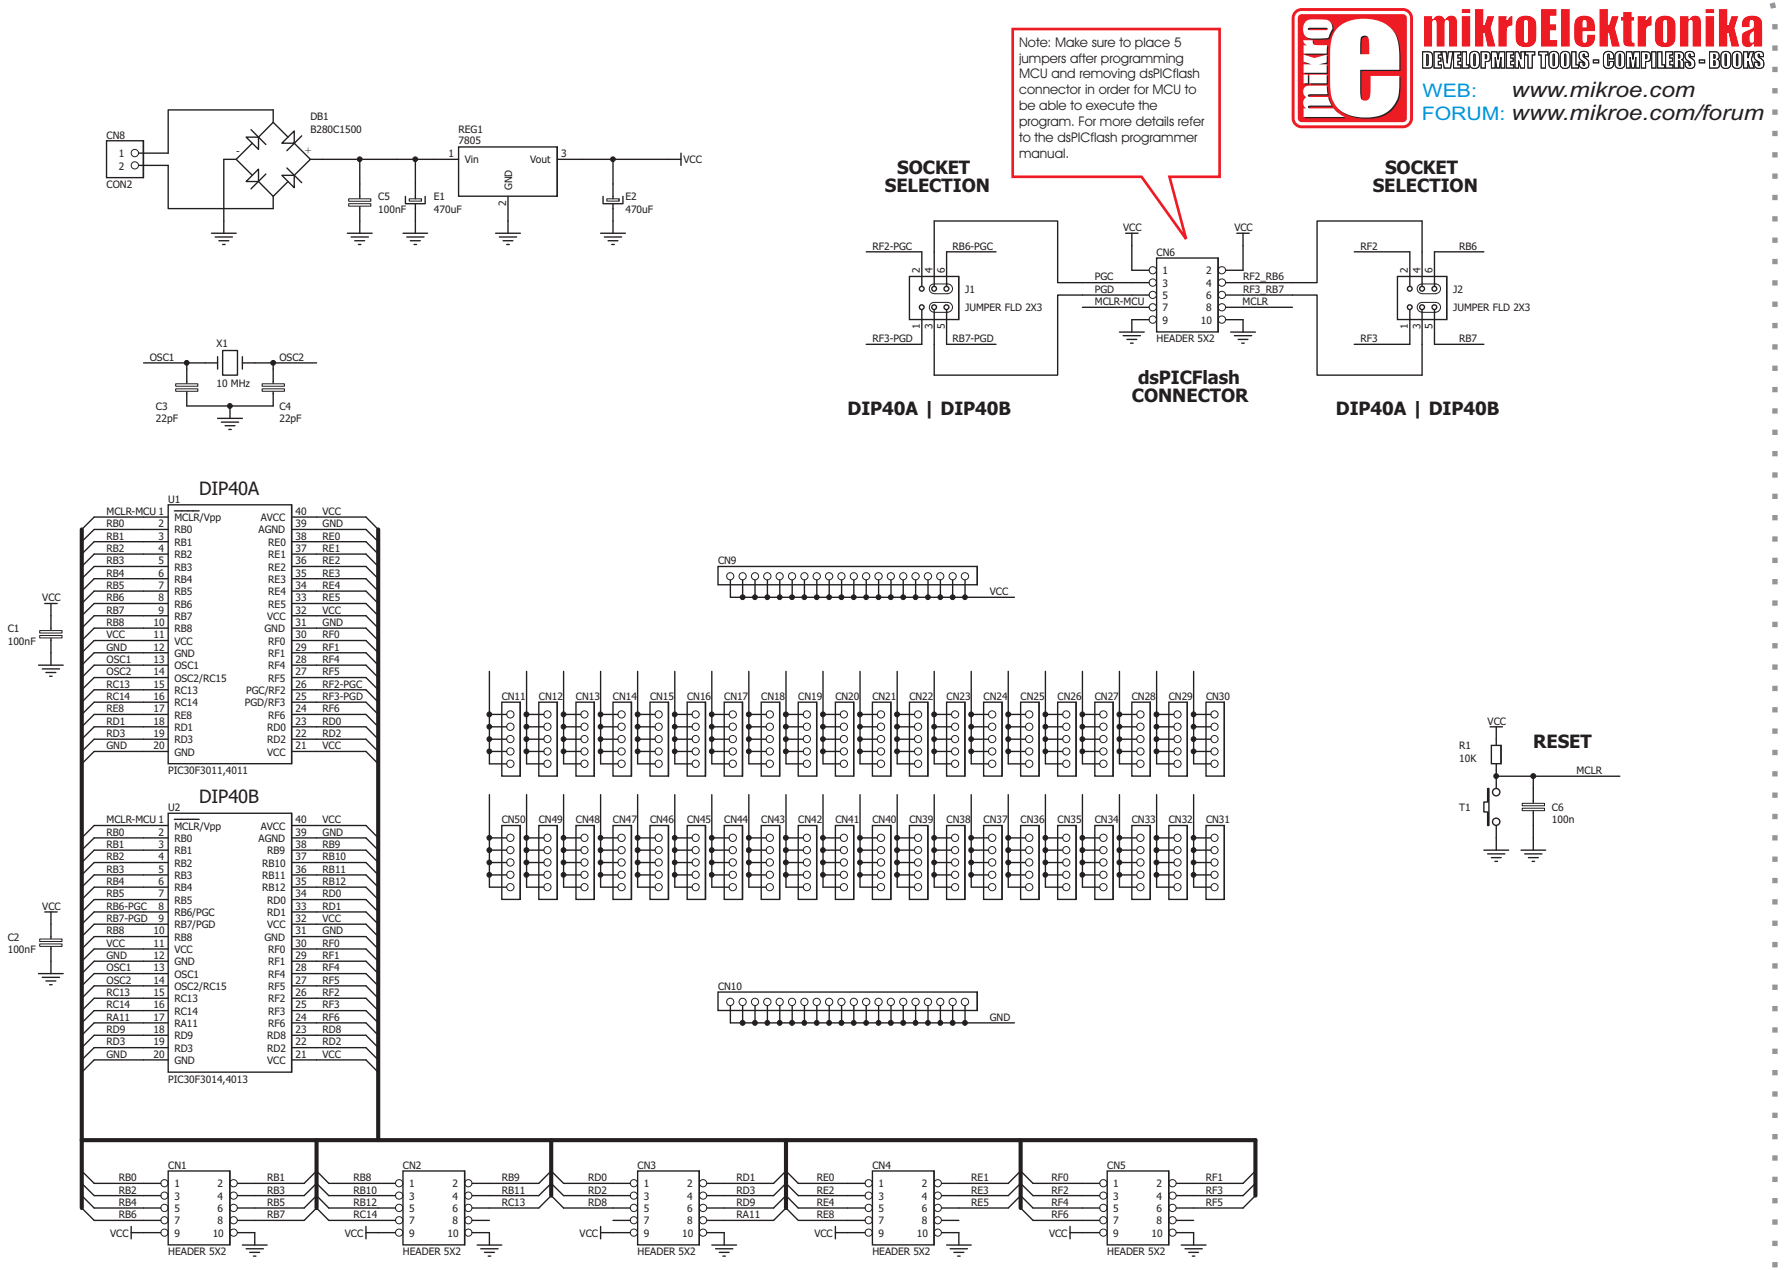
mikroElektronika
DEVELOPMENT TOOLS - COMPILERS - BOOKS
WEB: www.mikroe.com
FORUM: www.mikroe.com/forum
Note: Make sure to place 5 jumpers after programming MCU and removing dsPICflash connector in order for MCU to be able to execute the program. For more details refer to the dsPICflash programmer manual.
SOCKET SELECTION
SOCKET SELECTION
DIP40A | DIP40B
dsPICFlash CONNECTOR
DIP40A | DIP40B
DIP40A
DIP40B
PIC30F3011,4011
PIC30F3014,4013
HEADER 5X2
JUMPER FLD 2X3
RESET
dsPIC-Ready Schematic v100
Page 1/1
MikroElektronika Development systems