


RS232 Isolator 2 Click

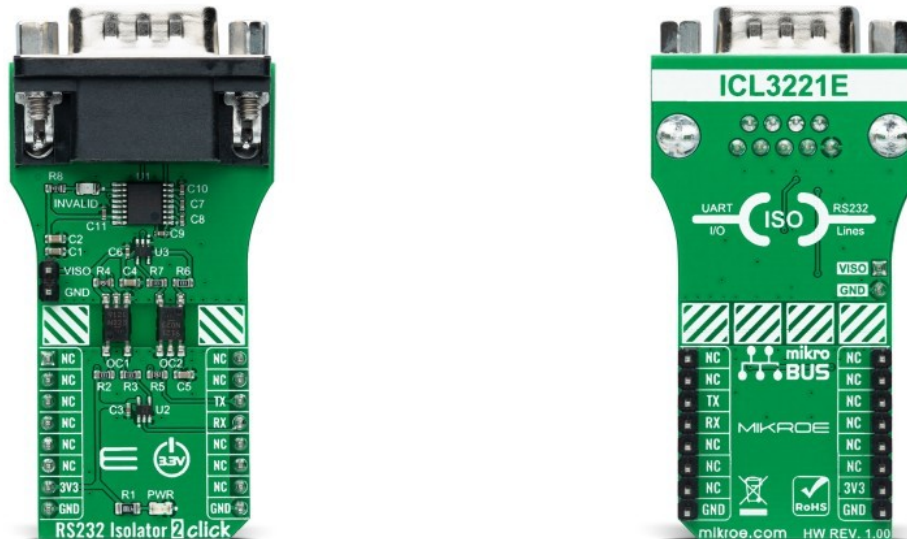

PID: MIKROE-4536

RS232 Isolator 2 Click is a compact add-on board that contains a fully isolated transceiver used to provide secure and easy UART to RS232 conversion. This board features the [ICL3221](#), a 3.3V powered RS232 transmitter/receiver that provides $\pm 15\text{kV}$ ESD protection on its RS232 pins from [Renesas](#). This Click board™ is characterized by an assured minimum data rate of 250kbps. It features an automatic power-down function and uses high-speed digital optocouplers to isolate the RS232 interface for 3.75kV isolation. It also possesses an LED indicator that indicates a valid RS232 signal at any of the receiver inputs. This Click board™ is suitable for isolation of RS232 signals, portable equipment, and where the low operational power consumption and even lower standby power consumption are critical.

RS232 Isolator 2 Click is supported by a [mikroSDK](#) compliant library, which includes functions that simplify software development. This [Click board™](#) comes as a fully tested product, ready to be used on a system equipped with the [mikroBUS™](#) socket.

How does it work?

RS232 Isolator 2 Click as its foundation uses the ICL3221, a 3.3V powered RS232 transmitter/receiver that provides $\pm 15\text{kV}$ ESD protection on its RS232 pins from Renesas. It features an automatic power-down function that occurs when the RS232 cable is removed and conserves system power automatically and power-up again when a valid RS232 voltage is applied to any receiver input. It also ensures data rates greater than 250kbps even at worst-case load conditions.

Mikroe produces entire development toolchains for all major microcontroller architectures.


Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
 ISO 14001: 2015 certification of environmental management system.
 OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

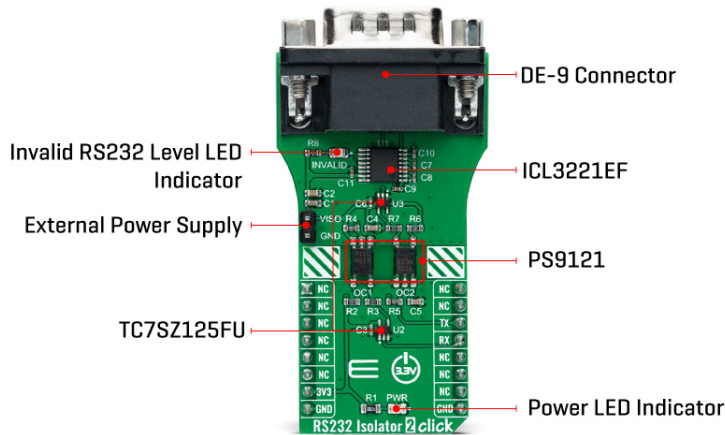

This Click board™ represents an isolated RS232 interface configuration using [PS9121](#), an optically coupled high-speed active low type isolator from [Renesas](#), containing a GaAlAs LED on the input side, a photodiode, and a signal processing circuit on the output side rated for 3.75kV isolation and up to 15Mbps data rate. The RS232 transceiver ICL3221 is specified with a data rate of 250kbps and operates from a 3.0V to 3.6V external power supply header on the board's right side. In addition to the optocouplers, the [TC7SZ125FU](#) logic buffers from [Toshiba Semiconductor](#) are used to drive the necessary LED currents that usually cannot be provided by low-power MCUs or RS232 receiver outputs.

The ICL3221 communicates with MCU using the UART interface with the default baud rate of 115200bps for the data transfer. It also comes equipped with the standard DB-9 connector, which makes interfacing with the RS232 simple and easy, and a red diode indicator labeled as INVALID indicates whether a valid RS232 signal is present not.

This diode always indicates whether a valid RS232 signal is present at any of the receiver inputs, giving the user a way to determine when the interface block should power down. If the interface cable is disconnected from the DB-9 connector and all the receiver inputs are floating, the ICL3221 detects invalid levels turning the LED. Reconnecting the cable restores valid levels at the receiver inputs, the diode turns off, and the power management logic wakes up the interface block.

This Click board™ can be operated only with a 3.3V logic voltage level. The board must perform appropriate logic voltage level conversion before use with MCUs with different logic levels. However, the Click board™ comes equipped with a library containing functions and an example code that can be used, as a reference, for further development.

Specifications

Type	Isolators,RS232
Applications	Can be used for isolation of RS-232 signals, portable equipment, and where the low operational power consumption and even lower standby power consumption are critical.
On-board modules	ICL3221 - RS-232 transmitter/receiver that provide ±15kV ESD protection on its RS-232 pins from Renesas PS9121 - optically coupled

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
 ISO 14001: 2015 certification of environmental management system.
 OHSAS 18001: 2008 certification of occupational health and safety management system.




ISO 9001: 2015 certification of quality management system (QMS).

	high-speed active low type isolator from Renesas
Key Features	Low power consumption, automatic power-down, assured minimum data rate of 250kbps, an isolated RS-232 interface using Renesas digital high-speed optocouplers, and more.
Interface	UART
Feature	No ClickID
Compatibility	mikroBUS™
Click board size	L (57.15 x 25.4 mm)
Input Voltage	3.3V

Pinout diagram

This table shows how the pinout on RS232 Isolator 2 Click corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Notes	Pin					Pin	Notes
	NC	1	AN	PWM	16	NC	
	NC	2	RST	INT	15	NC	
	NC	3	CS	RX	14	TX	UART TX
	NC	4	SCK	TX	13	RX	UART RX
	NC	5	MISO	SCL	12	NC	
	NC	6	MOSI	SDA	11	NC	
Power Supply	3.3V	7	3.3V	5V	10	NC	
Ground	GND	8	GND	GND	9	GND	Ground

Onboard settings and indicators

Label	Name	Default	Description
LD1	PWR	-	Power LED Indicator
LD2	INVALID	-	Invalid RS232 Level LED Indicator
J1	VISO	Populated	External Power Supply Header

RS232 Isolator 2 Click electrical specifications

Description	Min	Typ	Max	Unit
Supply Voltage	-	3.3	-	V
External Supply Voltage VISO	3	3.3	3.6	V
Isolation Voltage Range	-	-	3.75	kV
Data Rate	-	-	15	Mbps
Operating Temperature Range	-40	+25	+85	°C

Software Support

We provide a library for the RS232 Isolator 2 Click as well as a demo application (example),

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
 ISO 14001: 2015 certification of environmental management system.
 OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

developed using MikroElektronika [compilers](#). The demo can run on all the main MikroElektronika [development boards](#).

Package can be downloaded/installed directly from NECTO Studio Package Manager(recommended way), downloaded from our [LibStock™](#) or found on [mikroE github account](#).

Library Description

This library contains API for RS232 Isolator 2 Click driver.

Key functions:

- rs232isolator2_cfg_setup - Config Object Initialization function.
- rs232isolator2_init - Initialization function.
- rs232isolator2_default_cfg - Click Default Configuration function.

Examples description

This library contains API for RS232 Isolator 2 Click driver. This example transmits/receives and processes data from RS232 Isolator 2 clicks. The library initializes and defines the UART bus drivers to transmit or receive data.

The demo application is composed of two sections :

The full application code, and ready to use projects can be installed directly from NECTO Studio Package Manager(recommended way), downloaded from our [LibStock™](#) or found on [mikroE github account](#).

Other mikroE Libraries used in the example:

- MikroSDK.Board
- MikroSDK.Log
- Click.Rs232Isolator2

Additional notes and informations

Depending on the development board you are using, you may need [USB UART click](#), [USB UART 2 click](#) or [RS232 click](#) to connect to your PC, for development systems with no UART to USB interface available on the board. The terminal available in all MikroElektronika [compilers](#), or any other terminal application of your choice, can be used to read the message.

mikroSDK

This Click board™ is supported with [mikroSDK](#) - MikroElektronika Software Development Kit. To ensure proper operation of mikroSDK compliant Click board™ demo applications, mikroSDK should be downloaded from the [LibStock](#) and installed for the compiler you are using.

For more information about mikroSDK, visit the [official page](#).

Resources

[mikroBUS™](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

[mikroSDK](#)

[Click board™ Catalog](#)

[Click boards™](#)

Downloads

[TC7SZ125FU datasheet](#)

[PS9121 datasheet](#)

[ICL3221EF datasheet](#)

[RS232 Isolator 2 click schematic](#)

[RS232 Isolator 2 click 2D and 3D files](#)

[RS232 Isolator 2 click example on Libstock](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).